Lift Master

Automatic Garage Door Openers








ELEVATE YOUR SPACE.

Our leading garage door opener sets the bar high. With its innovative wall-mount design, the LiftMaster® 8500W opens up possibilities by freeing up space overhead. Plus, it's equipped with every advanced feature to keep everyday life running smoothly and safely—from Wi-Fi® for smartphone control to a deadbolt lock for maximum garage security. And that's just the beginning.



*Battery Backup must be installed. Must use 15" or greater radius track. Door must be properly balanced.

THE BOTTOM LINE:

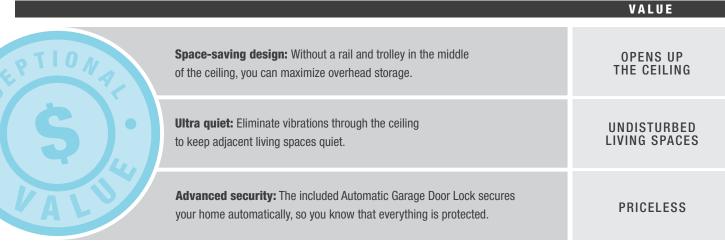



SPACE OPTIMIZATION No equipment overhead frees up additional storage space to declutter the garage.



REMOTE ACCESS

Built-in Wi-Fi[®] makes it easy to connect the opener with your smart device. Receive alerts and open and close the garage door from anywhere with the MyQ[®] App.*

*MyQ Remote LED Light must be installed to enable use of Timer-to-Close or MyQ smartphone control of the garage door. See User Guide for additional information.



AUTOMATIC ILLUMINATION The MyQ Remote LED Light mounts anywhere in the garage to brightly light the way as you come and go.





ULTRA-QUIET OPERATION

Wall-mount design and an ultra-quiet DC motor ensure comfortable living spaces above and next to the garage.

THE COMPLETE SOLUTION.

Our top accessories are included with every 8500W purchase

to make garage access reliable and secure.

SMART LIGHTING

MyQ[®] Remote LED Light 827LM

Can be scheduled to turn on and off through the MyQ App.

1,500 lumens fully illuminate the garage.

Add more lights for an even brighter garage.

ABSOLUTE PROTECTION

Automatic Garage Door Lock 841LM

Deadbolts the garage door every time it closes, making it virtually impenetrable.

The first garage door lock tested by UL[®], the leader in garage safety.



Add 1 more for maximum wind defense (2 max.).

STORM-PROOF POWER

Integrated Battery Backup 485LM

Keeps the opener working in a blackout so your family can still get in and out.

myQ.

Enables up to 20 open-andclose cycles within 24 hours on a standard door.

Battery Backup

TOTAL CONTROL

Smart Control Panel® 880LMW and 3-Button Remote Control 893MAX

Provide convenient ways to program and control your opener and MyQ Accessories.



150° sensing angle detects motion to automatically turn on the MyQ Remote LED Light.

Operates up to 3 openers or MyQ Light Accessories.

MyQ FITS YOUR SMART HOME.

Pair up with your favorite smart devices and platforms to customize control.





*Linking to MyQ App requires subscription fee after 30-day free trial. *Requires additional purchase of MyQ Home Bridge 819LMB. Smartphone not included.

SAFE HAVEN.

The 8500W offers the ultimate security solution that you can manage right from

your smartphone. With the MyQ[®] App, you can turn on the lights before anyone gets home and close the garage door if it was accidentally left open.* The Automatic Garage Door Lock adds another layer of security, automatically engaging every time the door closes. So you'll feel completely protected.



SECURITY'S AT OUR CORE.

For over 50 years, LiftMaster[®] has been engineering cutting-edge products that work together to deliver comprehensive garage security.



RIGHT ACCESS Protection features secure the garage and grant access only for you.







KNOWLEDGE Monitoring and controlling from anywhere for complete assurance.

8155W 1/2 HP AC BELT DRIVE WI-FI® GARAGE DOOR OPENER LEY FEATURES

Dependable performance.

INCLUDED ACCESSORIES:



MULTI-FUNCTION CONTROL PANEL® Includes lockout controls and accessory programmability.



1-BUTTON REMOTE CONTROL Operates a single opener.



POWERFUL ADD-ONS:



myQ HOME BRIDGE Adds Apple[®] HomeKit[™] compatibility and Siri® voice control to Wi-Fi-enabled openers. Installs easily in the garage within Wi-Fi range.**



MINI UNIVERSAL **REMOTE CONTROL** Compact and portable to provide quick, easy garage access.



Lift Master

myQ integrates with leading smart home platforms. Visit myQ.com to learn more.

OPERATION Belt Drive

Built In

RELIABLE

1/2 HP AC MOTOR IS PURPOSEFULLY DESIGNED AND BUILT TO LAST.

my

BELT DRIVE SYSTEM FOR QUIET, MAINTENANCE-FREE PERFORMANCE.

WARRANTY 4-YEAR MOTOR. 1-YEAR PARTS.

SMART

BUILT-IN WI-FI FOR THE EASIEST WAY TO CONNECT THE GARAGE.

myQ MOBILE APP LETS USERS RECEIVE ALERTS AND CONTROL THE OPENER FROM ANYWHERE.

SECURE

SECURITY + 2.0[®] SENDS A NEW CODE WITH EVERY REMOTE CLICK.

POSILOCK® ELECTRONICALLY PROTECTS AGAINST FORCED OPENINGS.

ALERT-2-CLOSE SIGNALS WHEN A DOOR IS BEING CLOSED BY myQ.

THE PROTECTOR SYSTEM® INVISIBLE LIGHT BEAM AUTO-REVERSES THE DOOR IF THERE IS AN OBSTRUCTION.

Smartphone not included

PRODUCT GUIDE 8155W 1/2 HP AC BELT DRIVE WI-FI GARAGE DOOR OPENER

LiftMaster

MASTERFUL ENGINEERING.

MOTOR

- -1/2 Horsepower AC
- 1,625 RPM - Automatic Thermal Protection
- Permanent Lubrication

POWER

- 120V AC
 - -60 Hz Voltage
 - -6A Current Rating
- -UL® Listed
- -4' Power Cord (3-Prong)

MECHANICS

- Steel Chassis, T-Rail and Trolley
- Full Reinforced Belt Drive Mechanism
- (16:1 Gear Reduction and Adjustable Door Arm)
- Auto-Force Adjustment for Changing Weather and Environmental Conditions
- Electronic Limits for Easy Setup
- **AC Wi-Fi Logic Board** with Built-In Surge Suppressor (for Replacement Logic Boards, Order Part 050ACTWF)

STANDARD SPECS.

SECURITY

RADIO CONTROLS 3-Button Remote Control (893LM)

SECURITY+ 2.0®

Operating Range: ~200'

Operating Temperature: -30°F to 150°F Frequency:

- -Remote Control Code Format:
- Security+2.0 - Garage Door Opener Code Format:
- Security+2.0
- -Security+ 2.0 Anti-Burglary Coding

SECURITY+ 2.0 ENCRYPTED CONTROLS

Multi-Function Control Panel® (882LMW)

HEAD

RAIL (7')

- Program Remote Controls
- Maintenance Alert System
- -Easy Wi-Fi Setup

SHIPPING.

SHIPPING WEIGHT (in lbs.)

CARTONS (2)

- CARTON 1: 20" x 12" x 10"
- Multi-Function Control Panel (882LMW)
- 3-Button Remote Control (893LM)
- Garage Door Opener Head (8155W)
- -The Protector System[®] Safety Reversing Sensors CARTON 2: 10'4" x 5" x 5" (for 7' Rail)
- -Assembled Solid-Steel Chain T-Rail

myQ® RADIO



- Provides 2-way communication from garage door opener and myQ Accessories.
- Enables monitoring and control of garage door openers via smartphone or tablet.

HOMELINK[®] COMPATIBLE (VERSION 4.0 OR HIGHER*)

*May require an external adapter depending on the model and year of your vehicle. Visit HomeLink.com for additional information.



DIMENSIONS


Rail Options	7'	8'	10'		
Installed Length	124"	136"	160"		
Max. Opening	7'6"	8'6"	10'6"		
Headroom Clearance Required: 2"					

51



to move downward





CONVENIENCE AND SAFETY.

- Alert-2-Close with Unattended Close Operation⁺
- Emergency/Quick Release
- Automatic Trolley Reconnect
- Ventilation/Pet Opening
- Down Safety Reverse
- Up Safety Stop

- Maintenance Alert System
- Garage Door Opener Capacity of up to 12 Remote Controls, 1 Keyless Entry System and 16 myQ Devices

*WARNING: to reduce the risk of injury to persons—ONLY enable Timer-to-Close and MyQ remote operation features when opener is installed on a sectional door.

©2022 Chamberlain Group LLC. All Rights Reserved. LiftMaster, the LiftMaster logo, my0[®] and the my0[®] logo are registered trademarks of The Chamberlain Group LLC. 300 Windsor Drive, Oak Brook, IL 60523 LiftMaster.com

Wi-Fi^{\otimes} is a registered trademark of Wi-Fi Alliance UL^{\otimes} and the UL logo are trademarks of UL LLC $^{<math>\otimes$} 2022 All Rights Reserved. LMGDENPG8155W_202201_MC21



8155W

1/2 HP AC BELT DRIVE WI-FI® GARAGE DOOR OPENER

8587W 3/4 HP AC CHAIN DRIVE WI-FI® GARAGE DOOR OPENER

Ultra-powerful performance for wind-load and heavy doors.



AUTOMATIC GARAGE DOOR LOCK CAPABLE: DEADBOLT LOCKS THE GARAGE DOOR, MAKING IT VIRTUALLY IMPENETRABLE (2 MAX., SOLD SEPARATELY).

SAFEGUARDS GARAGE ACCESS BY SENDING A NEW CODE WITH EVERY CLICK.

POSILOCK® ELECTRONICALLY PROTECTS AGAINST FORCED OPENINGS.

ALERT-2-CLOSE SIGNALS WHEN A DOOR IS BEING CLOSED BY myQ[®].

TIMER-TO-CLOSE CAN BE PROGRAMMED TO CLOSE THE DOOR AFTER A SET AMOUNT OF TIME.

MOTION DETECTOR LIGHTS THE WAY AUTOMATICALLY.

THE PROTECTOR SYSTEM® INVISIBLE LIGHT BEAM AUTO-REVERSES THE DOOR IF THERE IS AN OBSTRUCTION.

RELIABLE

3/4 HP AC MOTOR CHAIN DRIVE SYSTEM PROVIDES MAXIMUM POWER TO LIFT THE HEAVIEST DOORS.

I-BEAM RAIL SYSTEM AND REINFORCED CHASSIS MAXIMIZE SUPPORT.

WARRANTY LIFETIME MOTOR, 5-YEAR PARTS AND 1-YEAR ACCESSORIES.

SMART

BUILT-IN WI-FI FOR THE EASIEST WAY TO CONNECT THE GARAGE.

FREE myQ MOBILE APP SO USERS KNOW THEIR HOME IS SECURE.

REAL-TIME ALERTS INDICATE THE STATUS OF THE GARAGE DOOR VIA EMAIL OR PUSH NOTIFICATIONS.

MONITOR AND CONTROL THE OPENER FROM ANYWHERE USING MOBILE DEVICES.

PRODUCT GUIDE 8587W 3/4 HP AC CHAIN DRIVE WI-FI GARAGE DOOR OPENER

INCLUDED ACCESSORIES:

SMART CONTROL PANEL® LCD display enables simple programming and adjustment of settings.



3-BUTTON REMOTE CONTROL Operates up to 3 openers.



POWERFUL ADD-ONS:

AUTOMATIC GARAGE DOOR LOCK CAPABLE Deadbolts the garage door automatically every time it closes.



374U1

MINI UNIVERSAL REMOTE CONTROL Compact and portable to provide



WIRELESS KEYLESS ENTRY Provides convenient, secure access from outside the garage with a 4-digit PIN.

quick, easy garage access.





MASTERFUL ENGINEERING.

8587W

3/4 HP AC CHAIN DRIVE WI-FI® GARAGE DOOR OPENER

MOTOR -

- -3/4 HP AC
- -1,625 RPM
- Automatic Thermal Protection
- Permanent Lubrication

POWER --120V AC

- -60 Hz Voltage
- 5A Current Rating
- -III Listed
 - -6' Power Cord (3-Prong)

MECHANICS -

- Steel Chassis, I-Beam and Trolley
- Full Chain Drive Mechanism (16:1 Gear Reduction and Adjustable Door Arm)
- Auto-Force Adjustment for Changing Weather and Environmental Conditions
- Electronic Limits for Easy Setup
- Dual Sprocket: 6-Tooth, 8-Tooth
- AC Wi-Fi Logic Board with Built-In Surge Suppressor
- (for Replacement Logic Boards, Order Part 050ACTWFLK)
- 2 Lock Terminals Allow up to 2 Locks to Be Connected (Sold Separately)

SPECS. STANDARD

SECURITY+ 2.0® **RADIO CONTROLS**

Operating Range: ~200

Operating Temperature: -40°F to 150°F

3-Button Remote Control (893MAX)

- Remote Controls: Security+ 2.0
- Garage Door Opener: Security+ 2.0
- Anti-Burglary Coding

Premium remote control is backwards compatible to all LiftMaster® openers manufactured since January 1993.

ENCRYPTED CONTROLS

- Smart Control Panel® (880LMW)
- Timer-to-Close
- Program Remote Controls, Keypads and myQ Accessories
- Maintenance Alert System
- Easy Wi-Fi Setup

SHIPPING.

SHIPPING WEIGHT (in lbs.)

CARTONS (3)

- CARTON 1: 20" x 12" x 10"
- -Garage Door Opener Head (8587W)
- Smart Control Panel (880LMW)
- 3-Button Remote Control (893MAX)
- The Protector System® Safety Reversing Sensors

HEAD

- Chassis Support Bracket
- Safety Sensor Extension Brackets
- CARTON 2: 10'4" x 5" x 5" (for 7' Rail) - Assembled Solid-Steel Chain I-Beam
- CARTON 3 (OPTIONAL): 8" x 4.5" x 4"
- Automatic Garage Door Lock (841LM)

3

- LOCK (OPTIONAL)
- RAIL AUTOMATIC GARAGE DOOR

DIMENSIONS Rail Ontions

10

Rail Options	7'	8'	10'	12'	14'
Installed Length	125"	140"	164"	189"	213"
Max. Opening	7'6"	8'6"	10'6"	12'6"	13'6"
Headroom Clearance Required: 2"					

LiftMaster

8' 10' 12'

5" (6 TH Sprocket) (8 TH Sprocket Per second (6 TH Sprocket) for door

to move upward (8 TH Sprocket)

Per second for door to move downward

SPEED

5"

7 11

=

LIGHTING

- Max. 2 100-Watt Lightbulbs
- Adjustable Time
- Solid-State Delay
- Enhanced CFL (Compact Fluorescent)
- Compatible, Max. 26 Watts

- SAFETY AND SECURITY.
- Automatic Garage Door Lock Capable (2 Max.)
- Alert-2-Close/Unattended Close Operation[†]
- Motion Detection Feature on Control Panel
- Emergency/Quick Release
- Automatic Trolley Reconnect
- Ventilation/Pet Opening

- Down Safety Reverse
- Up Safety Stop
- Maintenance Alert System
- Garage Door Opener Capacity of up to 40 Remote Controls, 4 Wireless Keyless Entry Systems and 16 myQ Devices

*WARNING: to reduce the risk of injury to persons—ONLY enable Timer-to-Close and myQ remote operation features when opener is installed on a sectional door. ©2022 Chamberlain Group LLC. All Rights Reserved. LiftMaster, the LiftMaster logo, myQ® and the myQ® logo are registered trademarks of The Chamberlain Group LLC. 300 Windsor Drive, Oak Brook, IL 60523

LiftMaster.com

Wi-Fi® is a registered trademark of Wi-Fi Alliance UL® and the UL logo are trademarks of UL LLC © 2022 All Rights Reserved. LMGDENPG8587W_202201_MC21





myQ[®] RADIO

- 902–928 MHz 50-Channel FHSS
- Provides 2-way communication from
- garage door opener and myQ Accessories. Enables monitoring and
- control of garage door openers via smartphone or tablet.

HOMELINK® COMPATIBLE (VERSION 4.0 OR HIGHER*) *May require an external adapter

depending on the model and year

for additional information.

of your vehicle. Visit HomeLink.com








84505R

Secure View[™] Smart Garage Opener with Built-in Camera, Integrated Dual LED Lighting System, Ultra-Quiet Belt Drive[®]

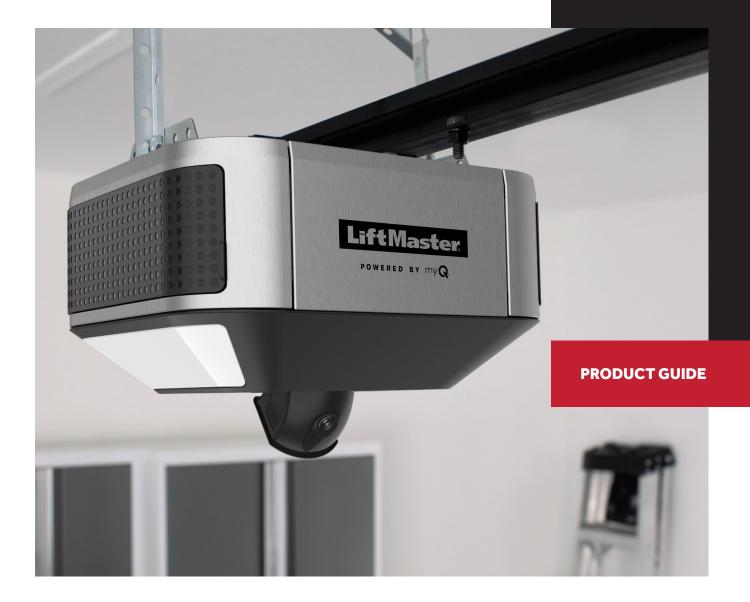



84505R

Secure View[™] Smart Garage Opener with Built-in Camera, Integrated Dual LED Lighting System, Ultra-Quiet Belt Drive®



Popular features

Quiet and smooth operation

Best-in-class belt drive system and DC motor provides reliable operation and lasting service.

myQ[®] Connected

Control, secure and monitor the garage from the myQ app anytime, from anywhere.

Secure in-garage delivery

Enables Amazon Key In-Garage Delivery - free for Amazon Prime members.

Security+ 2.0®

Safeguards garage access by sending a new code with every click of the remote.

Camera with 2-way communication

A built-in 130° wide angle camera lets you see and hear what's happening in your garage through the myQ app.

myQ Diagnostics compatible

Provides real-time insights for your garage door via its Health Report. You will be sent alerts if an issue arises and can connect to your Dealer for professional services if needed.


Invisible light beam system

Auto-reverses the garage door if there is an obstruction.

Posilock[®] protection


Electronically protects against forced openings of the door.





Do more with myQ

Use the myQ app to control, secure and monitor your garage and conveniently share and manage access to your home without sharing passcodes or keys. Also, take the hassle out of service repair and easily connect to a trusted Dealer through the myQ app.



Integrated dual LED lighting system

Increase the functionality of the garage and never change a garage light bulb again. Dual lighting system provides 1,500 lumens of long-lasting LED light that brightens high traffic areas of the garage.

In the box

893LM

+



3-Buttom Remote Control Operates up to 3 openers or myQ light accessories. Safeguards your home with Security+ 2.0.

882LMW



Multi-Function Control Panel® Operates the garage door opener and lights from inside the garage.

Specifications

Motor

12V DC, 53 RPM, automatic thermal protection

Mechanics

- Steel chassis, T-rail and trolley, full reinforced belt drive mechanism (63:1 gear reduction and adjustable door arm)
- Auto-force adjustment for changing weather and environmental conditions
- Electronic limits for easy setup
- DC Wi-Fi logic board with built-in surge suppressor (for replacement logic boards, order part 050DCTBFMC)

Power

120V AC, 60 Hz voltage, 6A current rating, UL Listed, 4' power cord (3-prong)

Speed

7.2" per second upward, 7.2" per second downward

Lighting

Dual light lens LED - 1,500 lumens

Dimensions

Opener head: 10.5" L x 12.72" W x 8.185" H Note: when both decorative doors are open, the width of the opener is 30".

Rail Options:	7' (2777BD)	8' (2778BD)	10' (2770BD)
Installed Length:	127"	139"	163"
Max Opening:	7' 6"	8' 6"	10' 6"

Headroom clearance required: 2"

Mounting

Side-to-Side

Warranties

Lifetime: Motor and Belt 1 Year: Parts, Camera, Accessories and LED

Security+ 2.0

Radio controls:

Operating range ~200'; Operating temperature: -40F to 150F; 3-Button Remote Control (893LM), Remote Control Code Format: Security+2.0, premium remote control; Garage Door Opener Code Format: Security+2.0; Anti-burglary coding.

Encrypted controls:

Multi-Function Control Panel (882LMW); Program remote controls, maintenance alert system, easy Wi-Fi set up.

myQ Radio

902-928 MHz 50-Channel FHSS (frequently hopping spread spectrum); Provides 2-way communication from garage door opener and myQ accessories; Enables monitoring and control of garage door openers via smartphone or tablet.

HomeLink[®] compatible (version 4.0 or higher)

May require an external adapter depending on the model and year of vehicle. Visit HomeLink.com for additional information.

Carton 1 shipping details

Dimensions: 14" x 12" x 11" Contents: Garage Door Opener Head (84505R), Multi-Function Control Panel (882LMW), 3-Button Remote Control (893LM), The Protector System® Safety Reversing Sensors Weight: 19.4 lbs.

Carton 2 shipping details

Dimensions: 10'4" x 5" x 5" (for 7' rail) Contents: Assembled Solid-Steel Belt T-Rail Weight: 17 lbs.



1590 The Queensway Toronto, Ontario M8Z IVI

416-533-4331 info@gemwindows.com gemwindows.com