


ALUMIL

SUPREME S77

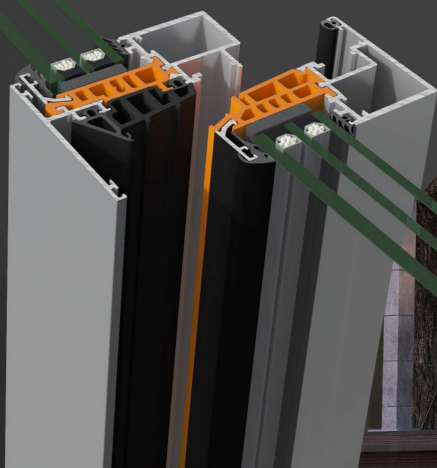


HINGED INSULATED SYSTEM

The system SUPREME S77 is ALUMIL's proposal for advanced insulating casements, with modern flat design which meet the high standards of private and public buildings in Western Europe. It is the ideal solution for projects that require high performance and maximum safety.

Furthermore, the system offers minimal design for windows & patio doors with the concealed sash and fittings. The SUPREME S77 satisfies the demanding levels of thermal insulation, water tightness performances which in combination with sound reduction, make it ideal for the most demanding projects.

- High thermal insulation value $U_i \geq 0,85 \text{ W/m}^2\text{K}$, certified by ift Rosenheim Institute.
- Visible aluminium face width 93 mm and only 67 mm for concealed sash.
- Maximum watertightness with 3 levels of EPDM gaskets and co-extruded EPDM and foam gasket.

- Specially designed low threshold for easy access for people with disabilities.
- For all typologies of hinged windows and patio doors.
- Wide range of sill profiles available.

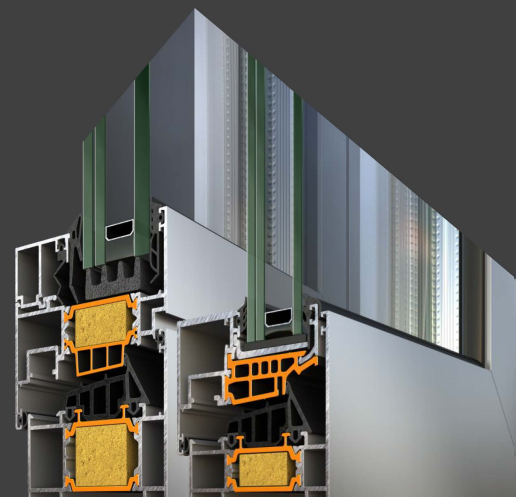





TECHNICAL CHARACTERISTICS

Visible aluminium face width	93 mm (only 67mm for concealed sash)
Frame height	61 mm
Frame width	77 mm
Sash height	73 mm
Sash width	85 mm
Sash weight	Up to 150 kg
Glazing	23 to 72 mm
Insulation	Polyamides 40 mm width, Kooltherm, PE insulation foam

TYOLOGIES

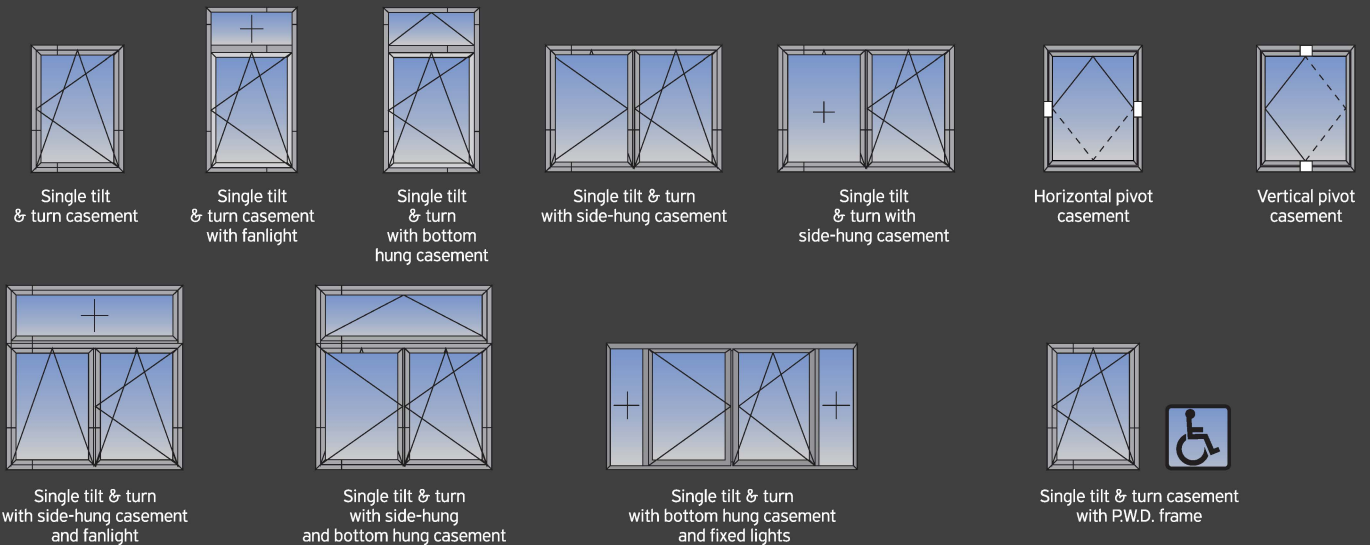

Concealed sash

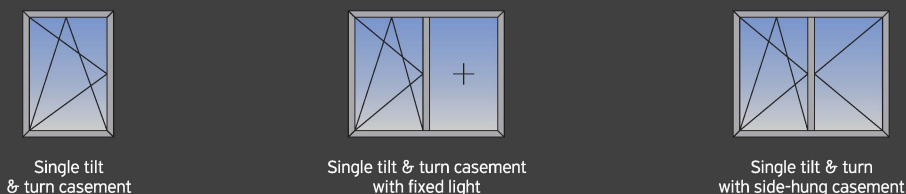

CERTIFICATES

	Air permeability EN 1026, EN12207	CLASS 4
	Watertightness EN 1027, EN 12208	CLASS E1500
	Resistance to wind load EN 12210, EN 12211	CLASS C5/B5
	Thermal Insulation EN 10077-2	$U_w = 0,95 \text{ W/m}^2\text{K}^*$

* For window dimensions 1,60 x 2,40 m and $U_g = 0,7 \text{ W/m}^2\text{K}$

Since 1961

GEMM

Windows & Doors
A better outlook on life

1590 The Queensway
Toronto, Ontario M8Z 1V1
416-533-4331
info@gemwindows.com